


# TORQUE WRENCHES Click Type

## MICRO-ADJUSTABLE Metal Handle Newton Meter

### FEATURES:

- Single scale, Calibrated clockwise direction
- Positive Lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read Laser marked scales
- Most feature Quick Release buttons which provide good socket retention as well as easy socket removal
- Accuracy +/- 3% Clockwise Direction, from 20-100% full scale
- Meets or exceeds ASME B107.14M-1994, ISO 6789 Standards
- Individually serialized with matching certificate of calibration traceable to N.I.S.T.

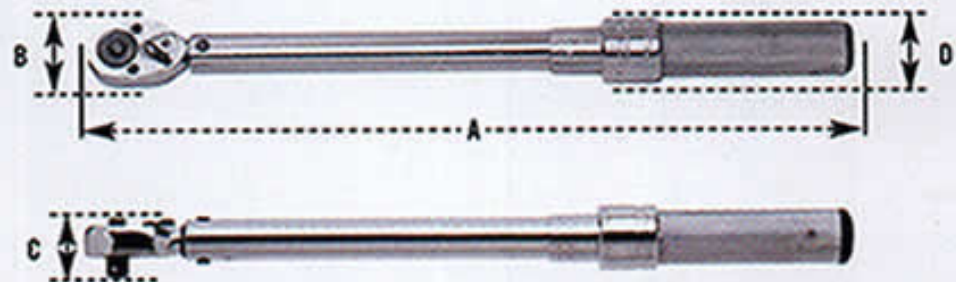

Part Number	Torque Range	Sq. Dr.	Incr.	A In. (mm)	B In. (mm)	C In. (mm)	D In. (mm)	Wt. Lbs. (Kg)
602NMRMHSS	10-60 Nm	3/8"	0.5	15.40 (391.16)	1.25 (31.75)	1.00 (25.40)	0.90 (22.86)	2.50 (1.13)
1002NMRMHSS	20-100 Nm	3/8"	0.5	15.40 (391.16)	1.25 (31.75)	1.00 (25.40)	0.90 (22.86)	2.50 (1.13)
2003NMRMHSS	40-200 Nm	1/2"	2	18.50 (469.90)	1.75 (44.45)	1.50 (38.10)	0.90 (22.86)	3.25 (1.47)
3403NMRMHSS	60-340 Nm	1/2"	2	24.40 (619.76)	1.75 (44.45)	1.50 (38.10)	0.90 (22.86)	3.40 (1.54)
8004NMRMHSS	150-800 Nm	3/4"	5	42.65 (1083.31)	2.50 (63.50)	2.00 (50.80)	1.25 (31.75)	5.00 (2.26)
15005NMRMHSS*	300-1500 Nm	1"	10	70.00 (1778.00)	2.50 (63.50)	2.50 (63.50)	1.50 (38.10)	25.10 (11.38)

\* NOTE: 15005NMRMHSS supplied with one extension handle and is packed in a metal box.